



web-site: [www.copa.co.il](http://www.copa.co.il)  
e-mail: [copa@copa.co.il](mailto:copa@copa.co.il)

כומפניקס תקשורת ואלקטרוניקה בע"מ

רח' צבי ברגמן 8, א.ת. סגולה, פתח-תקווה

טל: 03-9049004 פקס: 03-9344497

ח.פ. 512109968

מספר ספק משרד הביטחון: 83524121

## MODEL NUMBER: 18001

### Wireless-N 802.3at PoE Ceiling AP

The RP-WAC5405B Wireless-n ceiling AP is designed to target at the most effective, Home, and SOHO. The built-in 802.3at PoE feature allows you to add wireless access to existing business network without extra power adapter.

The device features advanced algorithms for automatic selection of modulation schemes to maximize the data rate and improve spectral efficiency. Software features such as WDS setting, Bridge VLAN setting, filtering, SNMP, web management, advanced QOS, DHCP, firewall, PPPoE, high grade encryption, port forwarding and Bandwidth control.

The features, high power and sensitivity, of RP-WAC5405B offers a solid coverage of the entire room. RP-WAC5405B is the most flexible and cost effective broadband wireless ceiling AP Platform.



## Features

- Wireless LAN 802.11n and 802.11b/g compliant
- Support advanced 2T2R Technology with up to 300Mbps downstream data rate
- Support PoE/PD function (IEEE802.3af/at)
- Support 64/128bit WEP encryption; Wi-Fi Protected Access(WPA) / WPA2
- Wireless Setting Operation Mode: AP / Pt(M)P Bridge / Client / Repeater
- Support adjustable transmit power by 1dBm
- Support VLAN & SNMP
- Support IEEE802.1d Spanning Tree settings
- Support multiple SSID with 802.1q VLAN tagging (up to 4)
- Maximum clients 128 (each VLAN supports 32 clients)
- Support QoS (WMM) and wireless traffic shaping & Time settings
- 9dBi MIMO antenna
- Support 48V by external PoE Injector (optional)



## Specification

<b>Standards</b>	IEEE 802.11n/b/g; IEEE 802.3; IEEE 802.3u; IEEE 802.3at PoE/PD
<b>Interface</b>	1* RJ-45, Auto MDI/MDI-X Ethernet 10/100Base-TX
<b>Antenna</b>	9dBi MIMO antenna
<b>SDRAM</b>	32M Bytes
<b>Flash</b>	8M Byte
<b>Frequency Band</b>	America/FCC: 2.412~2.462 GHz (11 channels) Europe CE/ETSI: 2.412~2.472 GHz (13 channels)
<b>Radio Frequency Type</b>	DSSS / OFDM
<b>Media Access Protocol</b>	CSMA/CA
<b>Modulation</b>	IEEE802.11b: CCK, DQPSK, DBPSK IEEE802.11n: OFDM with BPSK, QPSK, 16QAM, 64QAM
<b>Receiver Sensitivity</b>	-93@1Mbps; -84dBm @ 11Mbps; -75dBm @ 54Mbps; -68dBm@HT-20, MCS-15; -64dBm@HT40, MCS-15
<b>Transmission Power</b>	Up to 28dBm
<b>Transmission Rate</b>	IEEE 802.11b: 1/ 2/ 5.5/ 11 Mbps IEEE 802.11g: 6/ 9/ 12/ 18/ 24/ 36/ 48/ 54 Mbps IEEE 802.11n (2x2 HT20): 13.5/27/40.5/54/81/108/121.5/135 @ GI=800ns IEEE 802.11n (2x2 HT40): 15/30/45/60/90/120/135/150 @ GI=400ns 27/54/81/108/162/216/243/270 @ GI=800ns 30/60/90/120/180/240/270/300 @ GI=400ns
<b>Channel</b>	2.412~2.462GHz (Canada, FCC) -11 Channels 2.412~2.472GHz (Euro, ETSI) -13 Channels
<b>Security Systems</b>	64-bit / 128-bit WEP encryption; Wi-Fi Protected Access (WPA) / WPA2
<b>Operation Mode</b>	AP / Pt(M)P Bridge / Client / Repeater
<b>Software / Firmware</b>	Site survey DHCP Client Suppressed SSID Station Separation Spanning Tree settings Wireless access control by MAC address filter (up to 50) Support multiple SSID with 802.1q VLAN tagging (up to 4) Profile isolation from each other using VLAN (802.1q) standard Web-based configuration via popular browser (MS IE, Google Chrome...) Windows AP Locator utility for fast management Firmware upgrade and configuration backup via Web Browser Reset and/or restore to default by WebUI or by Reset button Support Auto-reboot & schedule reboot VPN pass-through SysLog Support SNMP v1/v2c, MIB I, MIB II (RFC-1213) Support QoS (WMM) and wireless traffic shaping & Time




web-site: [www.copa.co.il](http://www.copa.co.il)  
e-mail: [copa@copa.co.il](mailto:copa@copa.co.il)

# כומפניקס תקשורת ואלקטרוניקה בע"מ

רח' צבי ברגמן 8, סגולה, פתח-תקווה  
טל: 03-9049004 פקס: 03-9344497  
ח.פ. 512109968  
מספר ספק משרד הביטחון: 83524121

	settings Support Time settings, Ping function and Trace Route function Maximum clients 128 (each VLAN supports 32 clients)
Management System Browser Support	Standard SNMP interface support Windows XP, Vista, Windows 7, Windows 8
Dimension	Diameter: 143.6mm , Height: 46.8mm
Power Consumption	5.28W
Power Supply	802.3at PD complied, 48 Volts by external PoE Injector (optional)
Environment	Operating Temperature: 0 ~50°C Operating Humidity: 10~90% (Non-Condensing)
Certification	FCC, CE

## Application

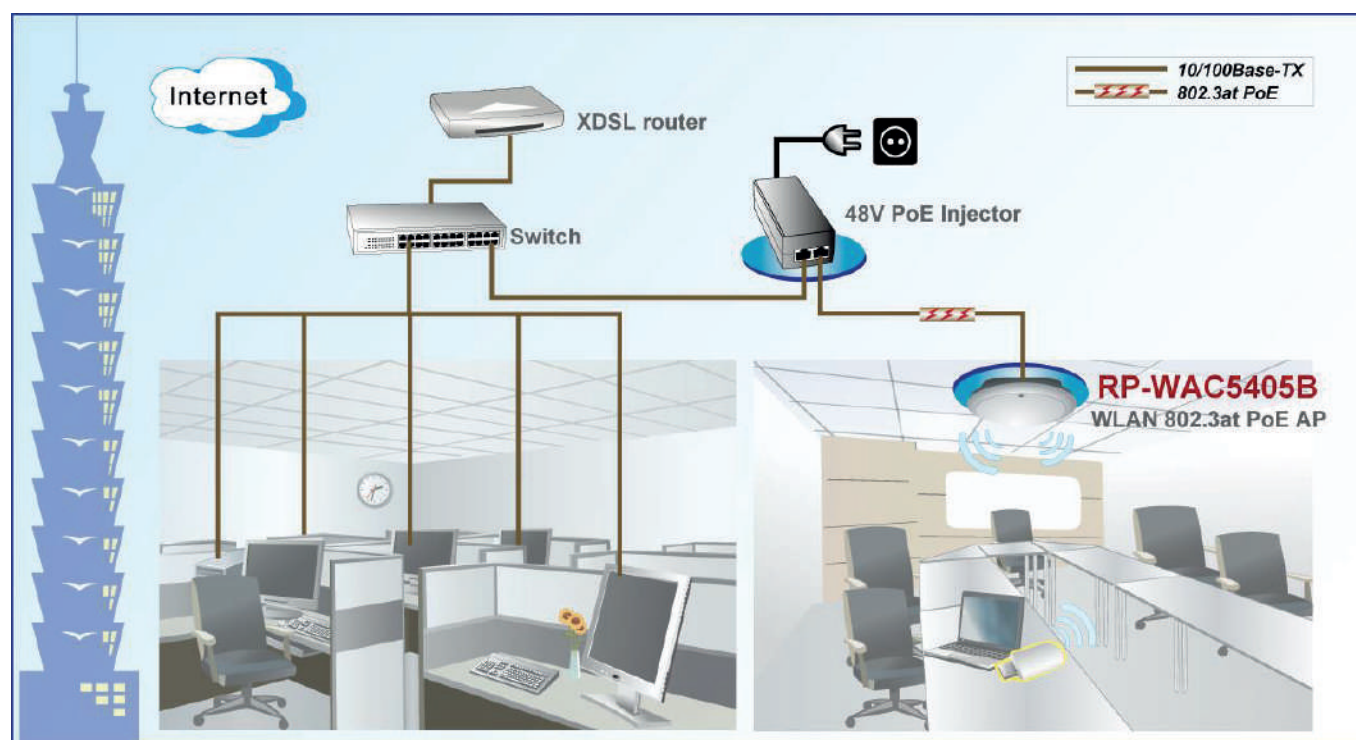

## Ordering information

**RP-WAC5405B** Wireless-N 802.3at PoE Ceiling AP, 2T2R