



web-site: www.copa.co.il
e-mail: copa@copa.co.il

כומפניקס תקשורת ואלקטרוניקה בע"מ

רח' צבי ברגמן 8, סגולה, פתח-תקווה

טל: 03-9049004 פקס: 03-9344497

ח.פ. 512109968

מספר ספק משרד הביטחון: 83524121

MODEL NUMBER: 18004

1000Base-T to mini-GBIC Smart Gigabit Media Converter



The Converter provides one channel media conversion between 1000Base-T and 1000Base-SX/LX through mini-GBIC module.

The Converter is a Plug-and-Play device, it provides optional management module (MOD-SNMP) that can control this media converter through the chassis system (RP-MCR116), the device can be controlled through Web Browser, SNMP and terminal emulation program.

The management module will detect the default reset on the DIP switches and display out the status, also the management module can control the function through the chassis system.


Feature

- Comply with IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-SX/LX Gigabit Ethernet Standards
- Provides one 1000Base-T port, one mini-GBIC port supporting either multi-mode or single-mode fiber
- Supports Full Duplex and Auto-negotiation mode for Fiber port
- Front panel diagnostic LED indications
- Provides Dip Switch to setting : Fiber (Auto/Manual), LLR (Enable/Disable)
- Provided 19" system chassis for up to 16-converter with Redundant Power Supply for optional Expansion use
- Supports LLCF (Link Loss Carry Forward, Link Pass Through)
- Provide Dip Switch to setting: Fiber (auto/manual), LLR (Enable/Disable)
- Monitor the status of duplex/ link for both media via management module MOD-MCSNMP through Media Converter Chassis System (MCR116)
- Set Duplex force, LLR on/off for Fiber, ports on/off via the MOD-MCSNMP through MCR116
- Provides link down source port information

Specification

Standards		<ul style="list-style-type: none"> • IEEE 802.3ab 1000Base-T • IEEE 802.3z 1000Base-SX • IEEE 802.3z 1000Base-LX
Interface		<ul style="list-style-type: none"> • 1 * 1000Base-T with RJ45 connector • 1*1000Base-SX/LX SFP slot
Protocol		<ul style="list-style-type: none"> • CSMA/CD
Data Transfer Rate		<ul style="list-style-type: none"> • 2000Mbps (Full Duplex)
Network Media	1000Base-T	<ul style="list-style-type: none"> • 4 pair Cat.5, EIA/TIA-568 100-ohm screened twisted-pair (STP), up to 100m
	1000Base-SX	<ul style="list-style-type: none"> • 62.5/125 μ m multi-mode fiber optic cable, up to 220m • 50/125 μ m multi-mode fiber optic cable, up to 550m
	1000Base-LX	<ul style="list-style-type: none"> • 9/125 μ m single-mode fiber optic cable
Dip Switch		<ul style="list-style-type: none"> • Auto negotiation or Manual for Fiber • LLR enable or disable for Fiber
LED Indicators		<ul style="list-style-type: none"> • Per Unit: Power • Per Port: Link/Activity
Power Consumption		<ul style="list-style-type: none"> • 5.5W
Power Supply		<ul style="list-style-type: none"> • External power Adapter DC5V/1A
Environment		<ul style="list-style-type: none"> • Operating Temperature: 0°C~40°C • Operating Humidity: 10%~90%
Dimension		<ul style="list-style-type: none"> • 120 * 88 * 25 mm
Certification		<ul style="list-style-type: none"> • FCC, CE

Application

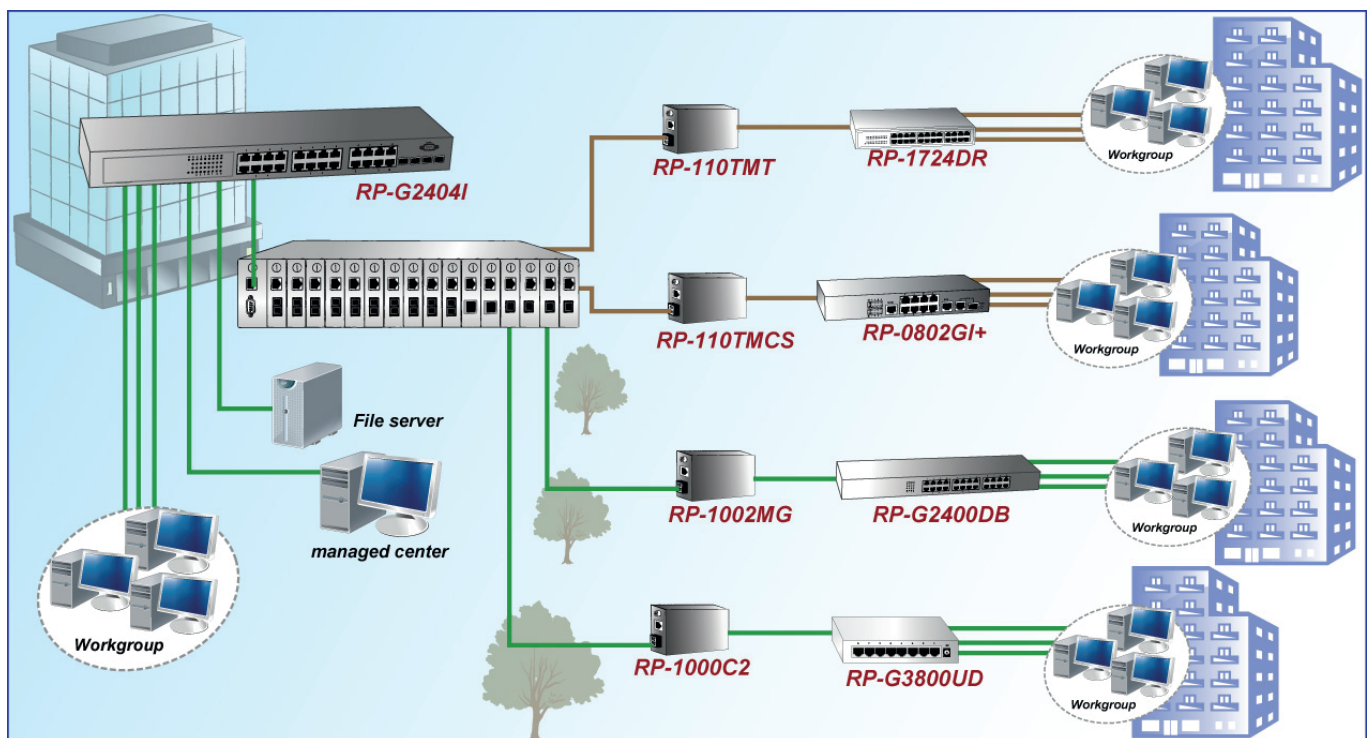

Ordering information

RP-1002MG 1000Base-T to mini-GBIC Smart Gigabit Media Converter